

AUNIS LIVING





AUNIS

Contents

	Page
Range introduction, lists of versions, important notes	2-3
Suggested combinations	4-5
Lowboards	6-7
Media accessories for lowboards	8-9
Sideboards, highboards, cabinet	10-11
Wall units	12
Glass rear walls for low-, side-, highboards, cabinet and wall units	13
Bookshelves, glass rear walls for bookshelves	14
Accessories for units, lamps	15-16
Dining, coffee tables	17
General information:	
Switch options for lamps	18-19
Special-sized products, special articles	20
Important notes: quality of walls / assembly instruction	21

Urban nature

Aunis follows an exciting concept: it combines urbanity and natural in a stunning designer line. Simplistic yet sophisticated, this ground-breaking design sets the benchmark for clever space optimisation with a stylish look. Aunis is made for living, dining and life.

Efficient design

Its compact yet elegant shape featuring a tapered carcass gives Aunis its unmistakable look. It effortlessly masters architectural challenges, as this concept makes the most of limited space. Smart sliding-doors add to the efficient use of the available space.

Beautiful solid wood

The charismatic design combines the elegant solid wood fronts with stunning glass inserts and distinctive lacquer accents. Depending upon personal taste, simply combine the warmth of natural oak or the elegance of walnut with cool anthracite structured lacquer.

Great variety

Aunis places chests featuring asymmetrically positioned glass next to generous glass cabinets and wall-mounted units that are true eye-catchers. The concept also includes an interesting interlinking between units, such as the lines of the glass cabinet compartments, which are cleverly repeated in the shape of the fitted shelves.

Plenty of comfort

As an urban range, the multi-functional Aunis offers sophisticated technical equipment such as the practical IR-repeater. LED lighting with colour change, which can be integrated and remote controlled, creates the perfect ambience for every mood.

Lists of versions

Version no.	Exterior carcass and front / cover shelf	Price group	Version no.	Accent front, cover shelf
2442	Solid natural oak rough look / Natural oak rough look	I	2333	Anthracite structured lacquer
1873	Solid walnut / Core walnut	II		

Interior carcass, interior fittings and bookshelf rear wall always in grey lacquer

Important notes

Glass versions:
Glass fronts and fitted glass shelves behind fronts of grey stained glass.
Optional glass rear wall of low-, side-, highboards, cabinet, wall units and bookshelves of satinised glass, anthracite rear-lacquered.

Rear walls:
Rear walls of low-, side-, highboards, cabinet, wall units and bookshelves in grey lacquer.
Units with glass section and bookshelves optionally available with glass rear walls (of satinised glass, anthracite rear-lacquered).

Cover shelves:
Cover shelves optionally in wooden version (veneer) or in anthracite structured lacquer.

Standard interior fittings:
Fitted wooden shelves are fitted behind doors at 2 Raster intervals and fitted glass shelves are fitted behind glass doors.

Wall units:
If units are planned as wall units, a wall bracket must be ordered.
Wall units always incl. wall bracket.

Drawer frames in grey

Combinations of floor and wall units:
If floor and wall units are combined within an arrangement, there must not be any skirting boards in the room near the floor units, otherwise they must be removed.


Max. load:
Max. load of wooden and glass shelves (up to 70.4 cm width) as well as drawers: 25 kg
Max. load of wooden and glass shelves (between 70.4 and 105.6 cm width): 15 kg;
from 105.6 cm width: 10 kg
Max. load of cover shelves: 35 kg per metre length for floor units. Please also note any maximum loads which may be stated in the type list for the individual units!

hülsta-SoftFlow: Drawers on hidden bearings incl. auto pull-in feature with brake as fully pull-out units

hülsta-MagicClose: All wooden hinge-doors with door cushioning system

Interior fittings of low- and sideboards

Interior fittings of low- and sideboards:
Behind the outer hinge-door of low- and sideboards there is 1 fitted shelf and in the compartment behind the glass sections of the drawers there is 1 metal support, 1 partition as well as 1 constructional shelf, resp. behind the sliding-door there is 1 constructional shelf.

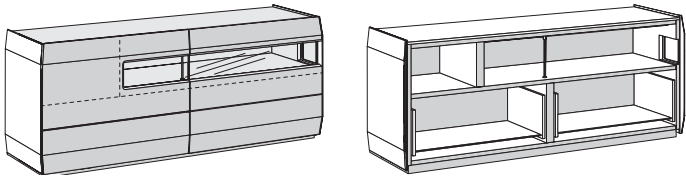

Wall units

If lowboards are included as wall units, a maximum load per unit of 15 kg per metre must not be exceeded for reasons of stability! Max. load 15 kg per metre:

144.6 cm width:	20 kg
179.8 cm width:	25 kg
215.0 cm width:	30 kg
232.6 cm width:	30 kg
267.8 cm width:	35 kg

The wall units can only be fitted on absolutely solid walls. Light masonry is not suitable for this purpose.

For each project please remember to leave a 2.0 cm gap at the top to be able to mount units.

Labelling in type list drawings / assembly notes for wall units

Labelling in type list drawings / assembly notes for wall units

The majority of units have two wall mounting points (= number of base plates), if these are to be fitted as wall units. This is not explicitly mentioned in the type list. If a different number of wall mounting points (= base plates) is required, this is marked in the drawings in the type list with numbers in black boxes.

Please be sure to note here the information and notes in the "Wall composition" chapter!



Notes on delivery

Notes on delivery:
The majority of the units are delivered standard as **fully connected units (glued)** so that the carcass **cannot be disassembled**. There are however some **exceptions** to this rule:

Some carcasses are delivered as complete units but can be **disassembled into individual sections** in the final customer's home. These types are marked with a **1** in the type list.

Some carcasses are delivered **in individual sections** because of their size. These types are marked with a **2** in the type list.

The fronts with the number **2** are delivered separately and can therefore always be (dis-) assembled.

Wall fitting


Important notes: Generally speaking, you as a dealer/qualified fitter are responsible for the correct wall mounting of the units. That is why wall mounting should only be carried out by properly trained and qualified fitters. hülsta supplies materials for mounting units on walls for nearly all the units and which should be used for safety and for constructional reasons. The assembly materials supplied by hülsta (plugs, screws) are only suitable for fitting components on to concrete in firmness class C12/15.

For other materials (please see separate materials table in the wall composition chapter) we provide you with an assembly mortar set as an extra order. Please note that this assembly mortar set is also only suitable for the materials listed in the materials table. If walls are made up of other materials (e.g. plastered or lighter wall materials), one should use another method of mounting better suited to the load on site. Please note that if the units are not mounted properly on the wall, there is a risk of the units falling down or tipping over – especially when alternative mounting materials acquired on site have been used. For the reasons stated above it is absolutely essential to enquire about the composition of any walls before signing any contracts.

Suggested combinations

Dark grey shading in the sketches = Components in accent versions

As an alternative to planning an individual unit from the complete range there is the possibility of choosing from specially suggested combinations. This eases planning. Incorporating accessories can enhance the suggested combinations. These are charged extra.

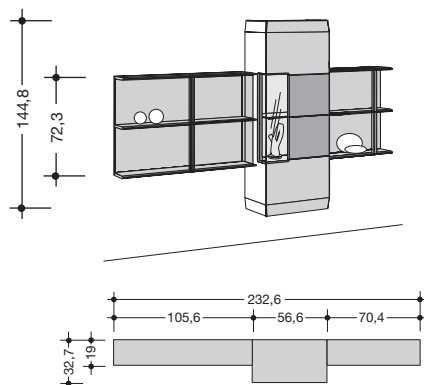


as illustr.
v. versa

**980001
980101**

Price gr.


I
II

-
-

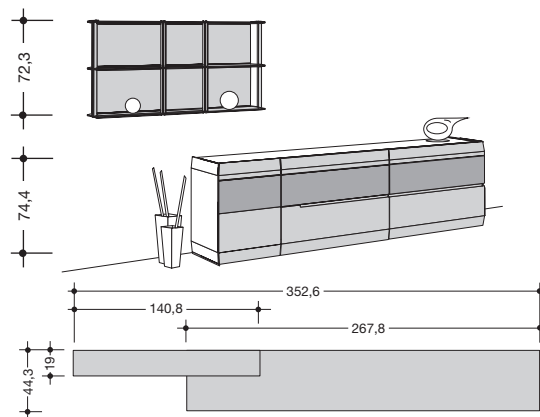

**980002
980102**

-
-

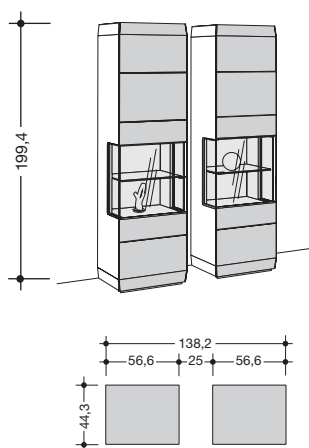


as illustr.
v. versa

980003

Price gr.


I
II

-
-

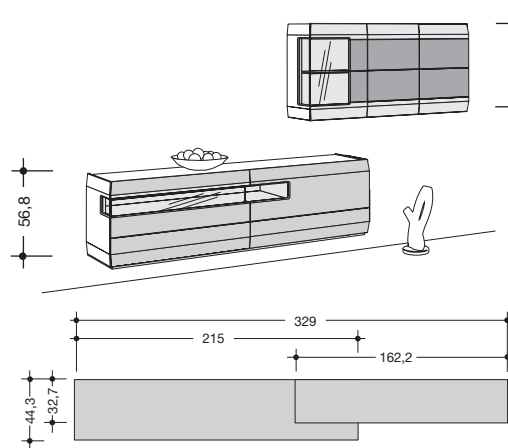

**980004
980104**

-
-

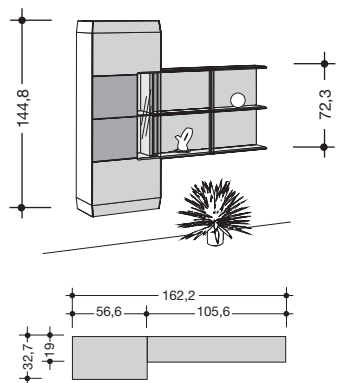


as illustr.
v. versa

**980005
980105**

Price gr.

I
II

-
-

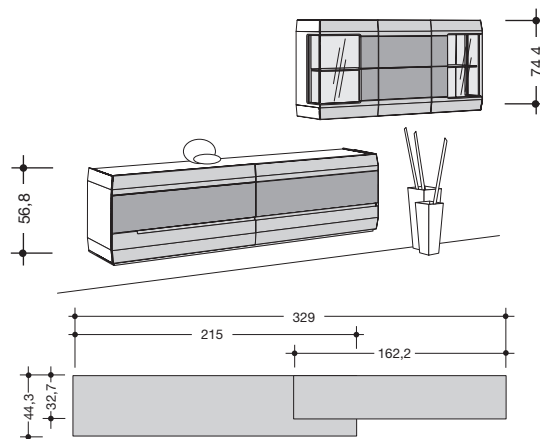


**980006
980106**

-
-

Suggested combinations





As an alternative to planning an individual unit from the complete range there is the possibility of choosing from specially suggested combinations. This eases planning. Incorporating accessories can enhance the suggested combinations. These are charged extra.

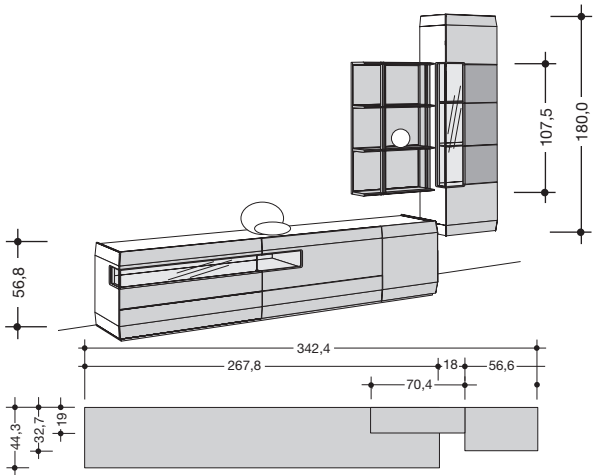

as illustr. v. versa	980007 980107	
Price gr. I II	- -	

Lowboards

Dark grey shading in the sketches = Components in accent versions

Lowboards 56.8 cm high (58.6 cm high incl. 1.8 cm high plinth), 44.3 cm deep Bottom drawers with handle recess		 <p>70,4 70,4</p> <p>144.6 cm wide</p>		 <p>105,6 70,4</p> <p>179.8 cm wide</p>	
as illustr. v. versa	4 drawers		4 drawers		
	314111 314112		317111 317112		
Price gr.	-		-		
I	-		-		
II	-		-		
		 <p>70,4 70,4</p> <p>144.6 cm wide</p>		 <p>88,0 88,0</p> <p>179.8 cm wide</p>	
as illustr. v. versa	2 drawers with glass section		2 drawers with glass section		
	314211 314212		317211 317212		
Price gr.	-		-		
I	-		-		
II	-		-		
Wall bracket If units are planned as wall units, a wall bracket must be ordered.		4144		4179	
		-		-	

When used as wall units:
 Max. load per unit: 40 kg


Notes on delivery:
Please see here the information on range introduction pages.

1
2

Assembly notes for wall units:
Please be sure to note here the information and notes in the "Wall composition" chapter!

3
4

AUNIS




215.0 cm wide

4 drawers

321111
321112

-
-




232.6 cm wide

1 door; 1 flap; 3 drawers

323111
323112

-
-




267.8 cm wide

1 door; 1 flap; 3 drawers

326111
326112

-
-



215.0 cm wide


2 drawers with glass section

321211
321212

-
-

4215

-



232.6 cm wide


1 door; 2 drawers with glass section

323211
323212

-
-

4232

-



267.8 cm wide

1 door; 2 drawers with glass section

326211
326212

-
-

4267

-

Media accessories for lowboards

IR repeater set

IR repeater set

Infrared signal transmission set for operating media units behind non-transparent fronts. You can operate all the units in one compartment with one set. The following applies:

- One set must be used in each compartment. 2 transmitters can also be installed in large compartments in order to increase performance. In this case only one additional transmitter needs to be ordered.
- The transmitter must be placed in the direct vicinity of the receiver eye.
- Transmittable IR frequency band 20 – 60 kHz
- Up to 3 transmitters can be combined with one receiver.

It is possible to use 3 transmitters via 1 receiver including Master box. This enables simultaneous operation of 3 different furniture compartments or in critical situations it allows fitting out one furniture compartment with several transmitters in order to increase the performance in this compartment or to operate 2 end units placed next to one another.

The IR repeater set consists of:

- 1 receiver eye (Ø 3.0 cm) incl. standing bracket
- 1 electrical transmitter
- 1 plug EVG 12 V
- Cable clips

Please note the details stated in the operating instructions!

IR repeater set
1 receiver eye and
1 transmitter incl. standing
bracket

2001

-







Extra transmitter

2003




-

Cable apertures

The cable apertures K2 and K8 are not possible, when glass rear walls are fitted in the lowboards!







	Cable aperture K1 silver-coloured; Ø 8.0 cm It is possible to fit a cable aperture in the top shelf of the lowboard. The cable aperture can be made at the rear of the top shelf. The position is in the centre of the compartment, distance from centre of aperture to rear edge of unit: 10.0 cm.	K1 -
	Cable aperture K2 silver-coloured; Ø 8.0 cm It is possible to fit a cable aperture in the rear wall of the lowboard. Positioned in centre of compartment.	K2 -
	Cable aperture K7 silver-coloured; 7.0 x 12.0 cm It is possible to fit a cable aperture in the top shelf of the lowboard. Positioned in centre of compartment, flush with the rear edge of the unit.	K7 -
	Cable aperture K8 silver-coloured; 12.8 x 3.2 cm It is possible to fit a cable aperture in the top shelf of the lowboard. The cable aperture can be made at the rear rim of the top shelf. Positioned in centre of compartment.	K8 -
	Cable aperture K9 13.0 x 1.6 cm It is possible to fit a cable aperture in a fitted shelf. The cable aperture can be made at the rear rim of the fitted shelf. Positioned in centre of compartment.	K9 -
	Cable aperture K20 silver-coloured; Ø 8.0 cm It is possible to fit a cable aperture in the partitions of the lowboard. Position: Distance from centre of aperture to rear edge of unit: 10.0 cm.	K20 -

Flat screen supports

<p>Flat screen support WTL6</p> <p>The flat screen support can be adjusted 3-dimensionally. It is suitable for flat screens with a screen diagonal of 102-216 cm (40"-85"); max. load: 45 kg.</p> <p>Suitable for Curved TV's.</p> <p>Flat screen support compatible with VESA Norm standard: min.: 200 x 200 mm max.: 600 x 400 mm</p> 	<p>Flat screen support THIN 545, ideally adaptable</p> <p>The flat screen support can be adjusted 3-dimensionally. It is suitable for flat screens with a screen diagonal of 102-165 cm (40"-65") and a maximum depth of 4.5 cm; max. load: 25 kg.</p> <p>Go to www.vogels.com to check if your flat screen can be fitted on this flat screen support. Enter the name THIN 545. After a few steps you can see if your flat screen TV is compatible with the flat screen support.</p> <p>Not suitable for Curved TV's.</p> <p>Flat screen support compatible with VESA Norm standard: min.: 100 x 100 mm max.: 600 x 400 mm</p> 	<p>Flat screen support THIN 515</p> <p>The flat screen support can be angled up to a max. 15°. It is suitable for flat screens with a screen diagonal of 102-165 cm (40"-65") and a maximum depth of 5.0 cm; max. load: 25 kg.</p> <p>Go to www.vogels.com to check if your flat screen can be fitted on this flat screen support. Enter the name THIN 515. After a few steps you can see if your flat screen TV is compatible with the flat screen support.</p> <p>Not suitable for Curved TV's.</p> <p>Flat screen support compatible with VESA Norm standard: min.: 100 x 100 mm max.: 600 x 400 mm</p> 
for fitting anywhere on walls	for fitting anywhere on walls	for fitting anywhere on walls
9704	9304	9504
-	-	-

Sideboards

Dark grey shading in the sketches = Components in accent versions

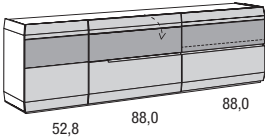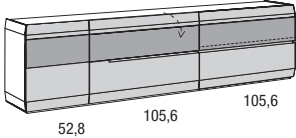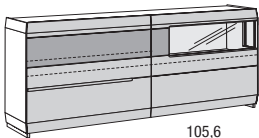Sideboards 76.2 cm high (incl. 1.8 cm high plinth), 44.3 cm deep Bottom drawers with handle recess				
	232.6 cm wide		267.8 cm wide	
	as illustr. v. versa	1 door; 1 flap; 3 drawers 423111 423112	as illustr. v. versa	1 door; 1 flap; 3 drawers 426111 426112
Sideboards with sliding-door 77.9 cm high (incl. 3.5 cm high plinth), 44.3 cm deep Bottom drawer with handle recess				
	179.8 cm wide		179.8 cm wide	
	2 drawers; 1 sliding-door 417111 417112		2 drawers; 1 sliding-door with glass section 417211 417212	
Sideboards with sliding-door 95.5 cm high (incl. 3.5 cm high plinth), 44.3 cm deep Bottom two drawers with handle recess				
	179.8 cm wide		215.0 cm wide	
	3 drawers; 1 sliding-door with glass section 517211 517212		3 drawers; 1 sliding-door with glass section 521211 521212	

Highboards

AUNIS

<div>Highboards</div> <div>146.6 cm high</div> <div>(incl. 1.8 cm high plinth),</div> <div>44.3 cm deep</div>				
<div><div><div><div><div><div></div><div></div><div></div><div></div></div><div>52,8</div><div>52,8</div></div></div><div>Illustr.:</div><div><div></div><div></div></div><div>109.4 cm wide</div></div><div><div><div><div><div></div><div></div><div></div><div></div></div><div>52,8</div><div>52,8</div></div></div><div>109.4 cm wide</div></div><div><div><div><div><div></div><div></div><div></div><div></div></div><div>52,8</div><div>35,2</div><div>52,8</div></div></div><div>144.6 cm wide</div></div><div><div><div><div><div></div><div></div><div></div><div></div></div><div>52,8</div><div>35,2</div><div>52,8</div></div></div><div>144.6 cm wide</div></div></div>				
as illustr. v. versa	1 door; 1 door with glass section		2 doors with glass section	
	810211 810212		81031	
	-		-	
Price gr.	-		-	
I	-		-	
II	-		-	















Cabinet

<div>Cabinet</div> <div>199.4 cm high</div> <div>(incl. 1.8 cm high plinth),</div> <div>44.3 cm deep</div>	
<div>Door with handle in anthracite structured lacquer</div>	
<div><div><div><div><div></div><div></div><div></div><div></div></div><div>52,8</div></div></div><div>L</div><div>56.6 cm wide</div></div>	
Price gr.	1 door with glass section
	115111 L 115112 R
	- -

Wall units

Assembly notes for wall units:
Please be sure to note here the information
and notes in the "Wall composition" chapter!

Dark grey shading in the
sketches = Components
in accent versions

Wall units 74.4 cm high, 32.3 cm deep	<div><div> 52,8 52,8</div><div> 109.4 cm wide</div></div> <div><div> 52,8 52,8</div><div> 109.4 cm wide</div></div> <div><div> 52,8 35,2 52,8</div><div> 144.6 cm wide</div></div> <div><div> 52,8 35,2 52,8</div><div> 144.6 cm wide</div></div>				
	as illustr. v. versa	1 door; 1 door with glass section	2 doors with glass section	2 doors; 1 door with glass section	1 door with glass section left and right; 1 door
		310511 310512	31061	314511 314512	314611 314612
	Price gr.	-	-	-	-
I	-	-	-	-	
II	-	-	-	-	
Max. load: 40 kg	<div><div> 52,8 52,8 52,8</div><div> 162.2 cm wide</div></div> <div><div> 52,8 52,8 52,8</div><div> 162.2 cm wide</div></div>				
	as illustr. v. versa	2 doors; 1 door with glass section		1 door with glass section left and right; 1 door	
		416511 416512		416611 416612	
	Price gr.	-		-	
I	-		-		
II	-		-		
Wall units 144.8 resp. 180.0 cm high, 32.3 cm deep Door with handle in anthracite structured lacquer	144.8 cm high		180.0 cm high		
	<div><div> 52,8</div><div>56.6 cm wide</div></div>		<div><div> 52,8</div><div>56.6 cm wide</div></div>		
	Price gr.	1 door with glass section		1 door with glass section	
		85511 L 85512 R		105511 L 105512 R	
Price gr.	-		-		
I	-		-		
II	-		-		
Max. load: 40 kg					

L/R = Door hinge left/right

E 7. 2023


Wohnen: AUNIS

Rear wall behind glass section in glass version


The rear walls behind the glass sections of low-, side-, highboards, cabinet and wall units are optionally available in glass version (satinised glass, anthracite rear-lacquered).

Later fitting is possible.


for lowboards



70,4



88,0



105,6

119

-


129

-


139

-

for sideboards



88,0



105,6


219

-


229

-

for highboards and wall units




52,8




52,8

52,8




52,8




52,8

52,8




52,8




52,8

52,8




52,8




52,8

52,8




52,8



52,8

52,8



52,8

419

-

for cabinet type 115111 L / 115112 R



52,8

429

-

for wall unit type 105511 L / 105512 R



52,8








619

-








Bookshelves

Assembly notes for wall units: Please be sure to note here the information and notes in the “Wall composition” chapter!




Dark grey shading in the sketches = Components in accent versions

Extension bookshelves 72.3 resp. 107.5 cm high, 19.0 cm deep Bookshelves for extending other (wall) units at one side with shelves in wood version and rear wall in grey lacquer; with metal supports in anthracite struc- tured lacquer on the outer side Wall fitting absolutely necessary	72.3 cm high		107.5 cm high	
	  Illustr.: outer metal supports left = bookshelf for extending left		  Illustr.: outer metal supports left = bookshelf for extending left	
	70.4 cm wide		105.6 cm wide	
	as illustr. v. versa Price gr. I II			
Free-hanging bookshelves 72.3 resp. 107.5 cm high, 19.0 cm deep Bookshelves for fitting anywhere on walls with shelves in wood version and rear wall in grey lacquer; with metal supports in anthracite struc- tured lacquer on both outer sides	72.3 cm high		107.5 cm high	
	  105.6 cm wide		 140.8 cm wide	
	105.6 cm wide		140.8 cm wide	
	Price gr. I II			
Max. load: 15 kg	-		-	
	-		-	
	-		-	
	-		-	


Bookshelf rear wall in glass version

<p>Bookshelf rear wall in glass version</p> <p>The bookshelf rear walls are optionally available in glass version (satinised glass, anthracite rear-lacquered).</p> <p>Later fitting is not possible.</p>				
				
	for 70.4 cm width		for 105.6 cm width	
		4719		4119
		-		-
				
	for 70.4 cm width		for 105.6 cm width	
		6719		6119
		-		-
				
for 105.6 cm width		for 140.8 cm width		
	4729		4129	
	-		-	
				
for 140.8 cm width				
	6129			
	-			

Accessories for drawers

	for 70.4 cm width	for 88.0 cm width	for 105.6 cm width
 Tableau lined with grey fabric	8620 -	8621 -	8622 -
	17.6 cm wide	35.2 cm wide	
 Cutlery box of metal, lined with grey fabric inside; incl. compartments	855 -	856 -	
	Set 1: for standard cutlery like spoons, forks, knives, etc.	Set 2: for sauce ladles, cake forks, cake servers, etc.	
 Cutlery holder lined with grey fabric, for fitting in drawers Set 1: for 60 pieces of cutlery Set 2: for 17 serving utensils	116 -	117 -	





















Fitted shelves

		for 35.2 cm width	for 52.8 cm width	for 88.0 cm width	for 105.6 cm width
 Fitted shelf 1.9 cm thick	for 32.7 cm depth	133 -	153 -		
	for 44.3 cm depth	134 -	154 -	184 -	1104 -

Accessories for units

Lamps

LED lamps incl. footswitch. A remote control unit is possible for operation (against a surcharge).

 <p>Integrated LED spotlight Ø 7.1 cm; for fitting in units</p> <p>Later fitting is not possible.</p> <p>This product contains a light source of energy efficiency class F. 12 V.</p> 	2.9 W				
	7941				
 <p>LED light panel 1.9 cm thick, 3.0 cm deep; for fitting under glass shelves</p> <p>Later fitting is not possible.</p> <p>This product contains a light source of energy efficiency class F. 12 V.</p> 	for 52.8 cm width				
	3.5 W				
 <p>LED bookshelf lamps</p> <p>Later fitting is not possible.</p> <p>This product contains a light source of energy efficiency class F. 12 V.</p> 	for 70.4 cm height	for 70.4 cm width	for 105.6 cm width	for 140.8 cm width	
		5.1 W	7.9 W	10.3 W	
 <p>LED bookshelf lamps</p> <p>Later fitting is not possible.</p> <p>This product contains a light source of energy efficiency class F. 12 V.</p> 	for 105.6 cm height	475	4105	4145	
		-	-	-	
 <p>LED light strip for fitting in the compartment behind the glass sliding-door</p> <p>Later fitting is not possible.</p> <p>This product contains a light source of energy efficiency class F. 12 V.</p>   	for fitting in the compartment behind drawers	for 144.6 cm width	for 179.8 cm width	for 215.0 cm width	for 232.6 cm width
		7.1 W	8.2 W	9.8 W	8.2 W
 <p>LED light strip for fitting in the compartment behind the glass sliding-door</p> <p>Later fitting is not possible.</p> <p>This product contains a light source of energy efficiency class F. 12 V.</p>   	for fitting in the compartment behind sliding-door	4106	4186	4136	4186
		-	-	-	-
 <p>LED light strip for fitting in the compartment behind the glass sliding-door</p> <p>Later fitting is not possible.</p> <p>This product contains a light source of energy efficiency class F. 12 V.</p>   	for fitting in the compartment behind sliding-door		5.9 W	7.1 W	
			486	4106	

Radio remote control with change of colour temperature

The lamps are normally operated by an external foot switch. The colour temperature of the LED lamps is cold white if a foot switch is used. A 4-channel radio remote control is also available as an alternative, which is charged extra. Several lamps can be operated with each of the 4 channels. All 4 channels can be dimmed separately at the push of a button. The colour temperature of all 4 channels can be set to any level from cold white (approx. 6500 kelvin = the basic setting of the LED lamps) to warm white (approx. 2700 kelvin). If warm white is required, a radio remote control must be ordered. It is also possible to switch all channels on and off simultaneously with the "all on" or "all off" buttons. The radio remote control consists of one transmitter and one receiver. If several receivers are required because of the arrangement of the units, these and the corresponding cables are provided ex-works (no surcharge). The foot switch is omitted when the radio remote control is used.



2119

DINING

hülsta offers a room concept to meet all requirements in comfort, beauty of form and attractiveness with a comprehensive collection of dining room tables and chairs.

The **dining tables** in a wide variety of sizes (with and without pullout function) in all wood surface versions and in contemporary designs, as well as the **dining chairs** that can be combined individually using different armrests, comfort features, high-grade cover fabrics (leather, textiles) and metal surfaces can all be found in the **"DINING"** type list.



Coffee tables CT 220

Coffee tables CT 220

The diagonal millings of the CT 220 create a dynamic overall look. The solid wooden versions natural oak and walnut highlight the natural yet elegant feel. Strong accents in anthracite structured lacquer provide an excellent contrast.

You will find the coffee table CT 220 as well as other coffee tables in the **"Coffee tables"** type list.



Coffee tables

Coffee tables

hülsta offers a comprehensive **collection of coffee tables**, which not only match the hülsta furniture ranges perfectly but can also be combined with other products that are available on the market. You will find these coffee tables in a number of designs, sizes and versions in the **"Coffee tables"** type list.



Radio remote control with change of colour temperature

The lamps are normally operated by an external foot switch. The colour temperature of the LED lamps is cold white if a foot switch is used. A 4-channel radio remote control is also available as an alternative, which is charged extra. Several lamps can be operated with each of the 4 channels. All 4 channels can be dimmed separately at the push of a button. The colour temperature of all 4 channels can be set to any level from cold white (approx. 6500 kelvin = the basic setting of the LED lamps) to warm white (approx. 2700 kelvin). If warm white is required, a radio remote control must be ordered. It is also possible to switch all channels on and off simultaneously with the "all on" or "all off" buttons. The radio remote control consists of one transmitter and one receiver. If several receivers are required because of the arrangement of the units, these and the corresponding cables are provided ex-works (no surcharge). The foot switch is omitted when the radio remote control is used.

- The following points must be noted with the radio remote control:**
- The receiver must be positioned behind a rear wall or under plinth shelves (at least 20 mm space required under plinth shelves).
 - The total wattage power of all lamps included per receiver must not exceed 30 W.
 - 4 channels = 4 light groups
 - 1 light group = x lights
 - All lamps within a light group can be dimmed to the same brightness.
 - The change of the colour temperature takes place for all lamps in all light groups.
 - The radio remote control is not suitable for equipment operating on 110 V.
- Please be sure to note the operating and programming instructions!**

4-channel radio remote control with change of color temperature



4-channel radio remote control with change of color temperature

Type	2119	-
------	------	---

Examples of use (schematic diagrams)

Example 1

Lights inside a unit


Channel 1 operates (and dims) all the lights in light group 1, i.e. the LED spotlight in the left cabinet

Channel 2 operates (and dims) all the lights in light group 2, i.e. the LED spotlamps in the open compartment

Channel 3 operates (and dims) all the lights in light group 3, i.e. the LED spotlight in the right cabinet

Notes:

The total wattage power of all lamps included per receiver must not exceed 30 W. The change of the colour temperature takes place for all lamps in all light groups.

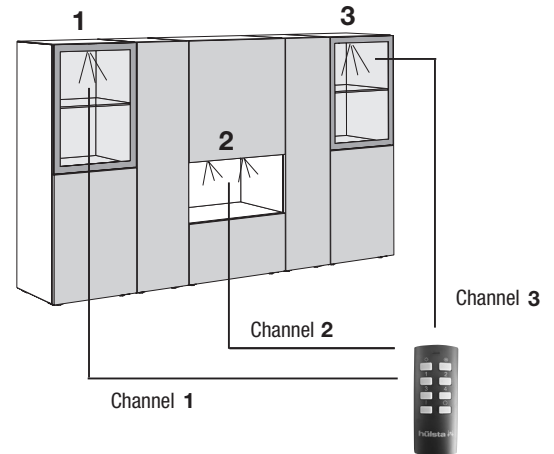

Example 2

Lights in units set apart


Channel 1 operates (and dims) all the lights in light group 1, i.e. the LED spotlight and the LED light panels in the left cabinet

Channel 2 operates (and dims) all the lights in light group 2, i.e. the LED spotlamps and the LED light panels in the centre cabinet

Channel 3 operates (and dims) all the lights in light group 3, i.e. the LED spotlight and the LED light panels in the right cabinet

Notes:

The total wattage power of all lamps included per receiver must not exceed 30 W. The change of the colour temperature takes place for all lamps in all light groups.

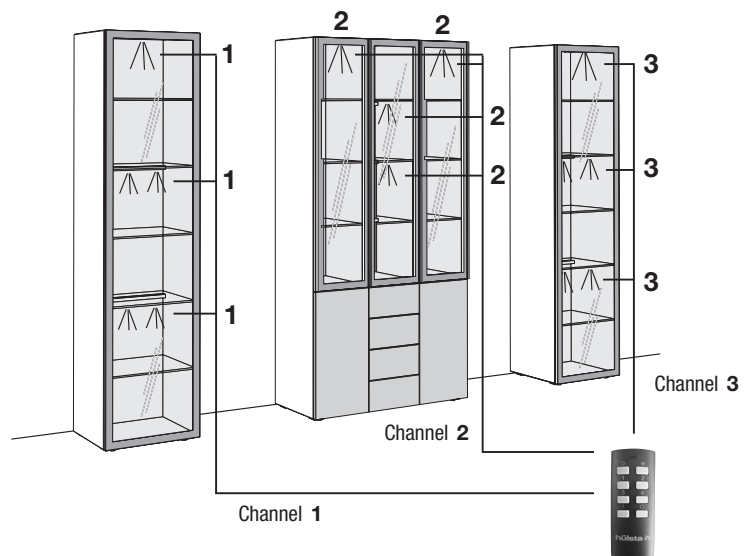

Example 3

Lights in units set apart


Channel 1 operates (and dims) all the lights in light group 1, i.e. the LED spotlamps in the left, centre and right cabinet

Channel 2 operates (and dims) all the lights in light group 2, i.e. the top LED light panels in the left, centre and right cabinet

Channel 3 operates (and dims) all the lights in light group 3, i.e. the bottom LED light panels in the left, centre and right cabinet

Notes:

The total wattage power of all lamps included per receiver must not exceed 30 W. The change of the colour temperature takes place for all lamps in all light groups.

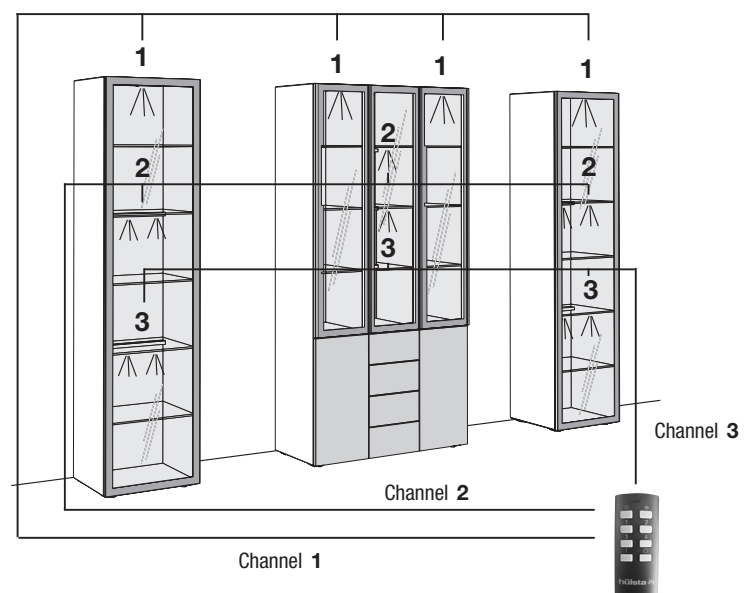

AUNIS

Special-sized products are possible on request.
Please get in touch with your customer advisor.

Special articles

Cover panels		
for side and top panelling of fitted wardrobes (support construction and fitting materials must be acquired on site).		
Basic price per order	9901	-
+ price per m ² lacquer or veneer	990	-
Veneer match with fronts can not be guaranteed.		
 Individual special-sized products		
If the special-sized product that you require is so unusual that it cannot be illustrated with the many special sized products that we already provide and charge for, then we will quote you the price using a 33 unit type factor. In your order please state for us the relevant enquiry number and the 33 unit type factor stated.		
	33	-

Special colours; Note on “Blue Angel” / Emissions label of DGM

Special colours
All the hülsta lacquer colours are possible for nearly all the hülsta ranges.
Availability and prices on request.

Note on “Blue Angel” (RAL-UZ 38) and Emissions label of DGM (Class A)
It is possible that the requirements of the “Blue Angel” and the DGM Emissions Label cannot be met by some of the lacquer colours in price groups III and IV (see here the different lacquer versions in the NEO range), depending on the colour mix (surface ratio of these colours in the corresponding order). However, the legal requirements are definitely met in all cases!

Wall composition / assembly instruction

Important notes:

The composition of walls must be ascertained before concluding a contract and be checked by a qualified fitter before assembly takes place.









Assembly may only be carried out by a qualified fitter under careful observation of the assembly instructions.

The plastic Rawl plugs supplied by hülsta as a standard set are only suitable for concrete $\geq C12/15$, if the wall composition and compression strength corresponds to the table below. Under no circumstances must a unit be assembled on light masonry.

Furthermore, we provide a mounting set with assembly mortar for the types of walls listed below (see assembly mortar set below). Again, assembly must be carried out by a qualified fitter under careful observation of the wall composition and assembly instruction. The compression strength levels stated below must be met under all circumstances.

Materials table

with a description of which sets are to be used with the following types of walls:

Standard set	Assembly mortar set only suitable for the materials stated below!	
Concrete C12/15 Compression strength $\geq 15 \text{ N/mm}^2$ 	 Building bricks Mz 12 Compression strength $\geq 12 \text{ N/mm}^2$	 Solid blocks of light concrete V2 Compression strength $\geq 2 \text{ N/mm}^2$
	 Limestone blocks KS 12 Compression strength $\geq 12 \text{ N/mm}^2$	 Perforated blocks of light concrete Hbl 2 Compression strength $\geq 2 \text{ N/mm}^2$
	 Perforated sand lime bricks KSL12 Compression strength $\geq 12 \text{ N/mm}^2$	 Aerated concrete PP2 Compression strength $\geq 2 \text{ N/mm}^2$
	 Vertically perforated bricks HLz 12 Compression strength $\geq 12 \text{ N/mm}^2$ Bulk density $\geq 1.0 \text{ kg/dm}^3$	

A different and more suitable type of mounting must be chosen by a qualified fitter in all other cases. hülsta cannot accept any responsibility for the choice of any other types of mounting! Please note that if the units are not mounted properly on the wall, there is a risk of the units falling down or tipping over – especially when alternative mounting materials acquired on site have been used. Generally speaking, you as a dealer/qualified fitter are responsible for the correct wall mounting of the units.



Mounting sets

Labelling in type list drawings / assembly notes for wall units

The majority of units have two wall mounting points (= number of support boards), if these are to be fitted as wall units. This is not explicitly mentioned in the type list. If a different number of wall mounting points (= support boards) is required, this is marked in the drawings in the type list with numbers in black boxes. Every support board requires four mounting screws.

3 = 3 support boards

4 = 4 support boards, etc.

One **assembly mortar set** is sufficient for up to a maximum of 3 support boards or 4 wall side-panels.

Important note: Depending on the composition of the wall (see wall types illustrated above), assembly must be carried out using the special assembly mortar set and a standard trade mastic tool which are the basic essentials for safe and clean workmanship.

Standard set

The standard set consists of 4 plastic Rawl plugs and 4 mounting screws and is sufficient for 1 support board. The standard sets are included in the packet of fittings to match the number of support boards.

Assembly mortar set for up to a maximum of 3 support boards consisting of:

9x injection retaining sleeve
9x screw-in sleeve
1x injection cartridge
2x static mixer
1x assembly instructions

Please use the mounting screws from the standard set (supplied free of charge).

Example of order:

- Add up number of support boards for all existing unit types
 - Divide the sum by "3"
 - Round up the result to a full number
- = Number of assembly mortar sets required

M2

-

hülsta AUNIS

Stand: E 7. 2023

Design and concept legally protected, subject to error and alterations to construction, colour and materials by way of technological progress.

hülsta-werke · Karl-Hüls-Straße 1 · D-48703 Stadthoehn
Tel. +49 (0) 2563 / 86-0 · Fax +49 (0) 2563 / 86-1000
www.huelsta.com

